



78L05ACZ - 78L12ACZ

Positive Voltage Regulators

GENERAL DESCRIPTION

This series of fixed-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. Each of these regulators can deliver up to 100 mA of output current. The internal limiting and thermal-shutdown features of these regulators them essentially immune to overload. Compliance to RoHS.

FEATURES

- 3-Terminal Regulators
- Output Current up to 100 mA
- No External Components
- Short circuit Protection
- Internal Thermal-Overload Protection
- With TO92 package

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings	Value	Unit
V_i	Input Voltage DC	$V_o = 5\text{ V}$	30
		$V_o = 12\text{ V}$	35
I_o	Output Current	100	mA
P_D	Power Dissipation	Internally Limited	
T_{OP}	Operating Junction Temperature	0° to 125	°C
T_{STG}	Storage Temperature	-40° to 150	°C

THERMAL DATA

Symbol	Ratings	Value	Unit
R_{thJA}	From Junction to Free-Air Thermal Resistance	200	°C/W

78L05ACZ - 78L12ACZ

ELECTRICAL CHARACTERISTICS OF 78L05ACZ

$V_i = 10\text{ V}$; $I_o = 40\text{ mA}$; $T_C = 25^\circ\text{C}$

Symbol	Ratings	Test Condition(s)	MIN	TYP	MAX	UNIT
V_o	Output Voltage	$T_C = 25^\circ\text{C}$	4.8	5	5.2	V
		$V_i = 7\text{ V to } 20\text{ V}$ $I_o = 1\text{ mA to } 40\text{ mA}$	4.75	5	5.25	
		$I_o = 1\text{ mA to } 70\text{ mA}$	4.75	5	5.25	
ΔV_o	Line Regulation	$7\text{ V} \leq V_i \leq 20\text{ V}$	-	-	150	mV
		$8\text{ V} \leq V_i \leq 20\text{ V}$	-	-	100	
ΔV_o	Load Regulation	$I_o = 1\text{ mA to } 100\text{ mA}$	-	-	60	mV
		$I_o = 1\text{ mA to } 40\text{ mA}$	-	-	30	
I_B	Quiescent Current		-	-	6	mA
ΔI_{B1}	Quiescent Current Change	$8\text{ V} \leq V_i \leq 20\text{ V}$	-	-	1.5	mA
ΔI_{B2}	Quiescent Current Change	$I_o = 1\text{ mA to } 40\text{ mA}$	-	-	0.1	mA

ELECTRICAL CHARACTERISTICS OF 78L12ACZ

$V_i = 19\text{ V}$; $I_o = 40\text{ mA}$; $T_C = 25^\circ\text{C}$


Symbol	Ratings	Test Condition(s)	MIN	TYP	MAX	UNIT
V_o	Output Voltage	$T_C = 25^\circ\text{C}$	11.5	12	12.5	V
		$V_i = 14.5\text{ V to } 27\text{ V}$ $I_o = 1\text{ mA to } 40\text{ mA}$	11.4	12	12.6	
		$I_o = 1\text{ mA to } 70\text{ mA}$	11.4	12	12.6	
ΔV_o	Line Regulation	$14.7\text{ V} \leq V_i \leq 27\text{ V}$	-	-	250	mV
		$16\text{ V} \leq V_i \leq 27\text{ V}$	-	-	200	
ΔV_o	Load Regulation	$1\text{ mA} \leq I_o \leq 100\text{ mA}$	-	-	100	mV
		$1\text{ mA} \leq I_o \leq 40\text{ mA}$	-	-	50	
I_B	Quiescent Current		-	-	6.5	mA
ΔI_{B1}	Quiescent Current Change	$16\text{ V} \leq V_i \leq 27\text{ V}$	-	-	1.5	mA
ΔI_{B2}	Quiescent Current Change	$1\text{ mA} \leq I_o \leq 40\text{ mA}$	-	-	0.1	mA

78L05ACZ - 78L12ACZ

MECHANICAL DATA CASE TO92 REGULATOR

Pin 1 :	Input
Pin 2 :	GND
Pin 3 :	Output

DIMENSIONS		
mm	Min	Max
A	4,45	4,95
B	4,32	4,95
C	12,70	15,49
D	0,41	0,56
E	3,43	3,43
F	2,41	2,67
G	1,14	1,40
H	3,30	3,94
I	2,38	2,42
J	2,38	2,42

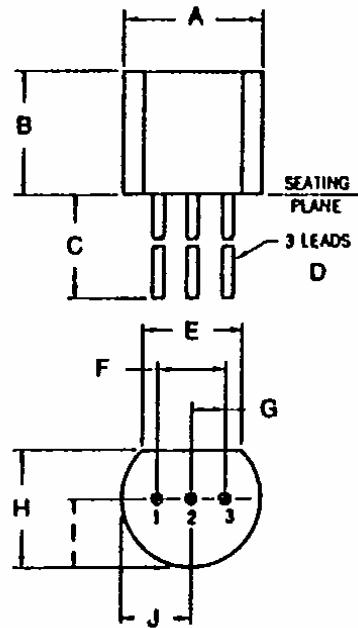

Revised August 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.